





High Flow Filter Cartridges

Series 740B30



Creative Answers Shaping Cleaner Environments

Technical Data

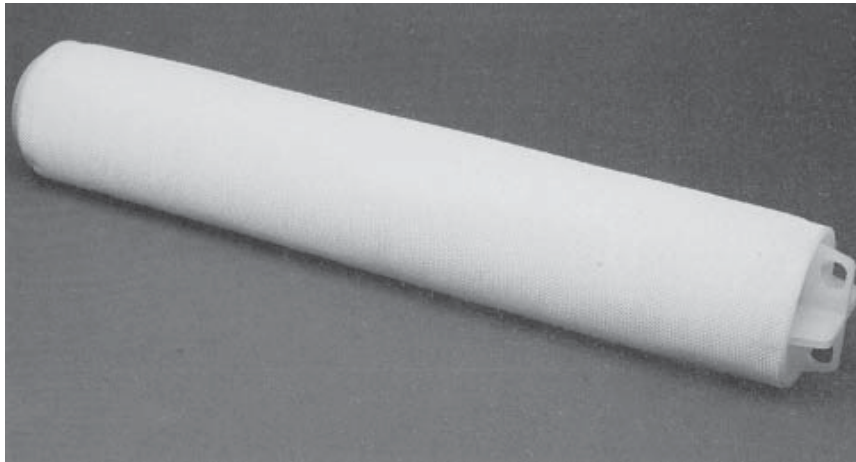

Features, Advantages and Benefits

The 3M™ High Flow Filter Cartridge, 740B30 which incorporates the patented radial pleat, puts an extraordinary amount of surface area into a single cartridge. This results in the following:

- High loading capacity for long life and lower cost filtration.
- Fewer cartridges for fewer change-outs, thus less labor cost.
- Fewer seals, reduced risk of bypass, thus high quality.
- Extremely low disposal costs, less than a tenth of some cartridges.

Designed to fit in a range of vessels that holds from one to over 37 filters for a wide range of flow rates in competitively priced hardware.

Double O-ring seals in a variety of material options means:

- Extremely low risk of bypass for high quality fluids.
- No loose parts to assemble for easy installation, thus less labor cost.
- Also, no springs and caps to lose reduces the risk of bypass.
- Broad chemical compatibility for many applications.

Meltblown FDA compliant polypropylene microfiber filter media provides high particle removal efficiency for high quality filtration with broad chemical compatibility.

Convenient handle for easy manual or mechanical removal.

Materials of Construction

Filter Media:

FDA compliant polypropylene meltblown microfibers.

Inner Core, Outer Sleeve and End Caps:

FDA compliant polypropylene

O-rings:

Product Number

Material

7010	FDA Buna N (standard)
7011	Ethylene Propylene Rubber
7012	PTFE encapsulated Silicone
7013	FDA Silicone
7014	Fluoroelastomer

Applications

Prefilters or final filters for:

- Acids and bases
- Amines
- Beer and wine
- Bottled water
- Carbon beds
- Completion fluids
- Deep wells
- Desalination
- DI resins
- Edible oils
- EDM fluids
- Fructose
- Glycol
- Groundwater clean-up
- Laundry water
- Liquor
- Machine coolants
- Magnetic media
- Makeup water
- Organic solvents
- Photo chemicals
- Plating solutions
- RO membranes
- Storm water
- UF membranes
- Ultrapure water
- Wastewater
- Waterflood
- Workover fluids

Performance Data

Loading Capacity

Product Number	742B	743B	744B	745B	746B	747B	748B	749B
Pounds at 30 gpm	8.9	13.4	13.3	13.3	13.7	16.1	17.3	17.5
Kilograms at 7 cu m/hr	4.0	6.1	6.0	6.0	6.2	7.3	7.8	7.9

Loading: Loading capacity is extremely high due to the large amount of surface area available. The data above shows typical loading capacities of the different micron rated filters. Loading capacity is determined by challenging a filter with a dispersion of silica test dust in water at the recommended flow rate. Pressure drop is monitored and testing is terminated at 50 psid (3.4 bar). (742B is terminated at 35 psid– 2.4 bar.) The loading capacity reported is the dry weight gain of the cartridge.

Particle Removal Efficiency (microns)

Product Number	742B	743B	744B	745B	746B	747B	748B	749B
Efficiency @ 99%	1	2	5	10	15	25	40	70
Efficiency @ 95%	0.9	1.1	2.5	8	9	13	24	43
Efficiency @ 90%	0.8	0.9	1.7	6	8	10	19	35
Efficiency @ 75%	<0.7	0.7	1.5	3.5	6	8	13	24
Efficiency @ 50%	<0.7	<0.7	1.1	1.5	4.0	4.5	8	14

Efficiency: The 3M™ High Flow Filter Cartridges are rated using a silica test challenge in water at 30 gpm (6.8 cu m/hr). The results reported are typical initial efficiencies taken within ten minutes of the start of the test. For more information on how 3M conducts its filter efficiency testing, please see “Defining Filter Efficiency”, a 3M Technical Report available from your local distributor.

Clean Pressure Drop Versus Flow Rate (psid)

Product Number	742B	743B	744B	745B	746B	747B	748B	749B
Δp @ 10 gpm	0.3	0.2	0.1	0.1	0.1	0.05	0.05	0.04
Δp @ 20 gpm	0.7	0.5	0.2	0.2	0.1	0.11	0.10	0.08
Δp @ 30 gpm	1.0	0.9	0.4	0.3	0.2	0.21	0.18	0.15
Δp @ 40 gpm	1.3	1.1	0.6	0.4	0.4	0.30	0.25	0.20

Pressure Drop: The 3M High Flow Filter Cartridges have low initial pressure drop (Δp) in water as the chart indicates. The chart does not include the pressure drop of the vessel, which must be added in when sizing your filter system.

Product Specifications

Micron Ratings:

Product Number	Initial Efficiency
742B30	1 micron @ 99%
743B30	2 micron @ 99%
744B30	5 micron @ 99%
745B30	10 micron @ 99%
746B30	15 micron @ 99%
747B30	25 micron @ 99%
748B30	40 micron @ 99%
749B30	70 micron @ 99%

Dimensions (Nominal):

Outer Diameter:	6.5 inches	16.5 cm
Inside Diameter:	1.6 inches	4 cm
Length:	28.75 inches	73.0 cm
226 O-ring Inside Diameter:	2 inches	5 cm
226 O-ring Thickness:	0.14 inches	0.35 cm

Operating Condition:

Maximum Operating Temperature:	160F	70C
Recommended Flow: (for normal loading in water)	30 gpm	6.8 cu m/hr
Suggested Maximum Flow: (in water)	742B30-743B30 – 45 gpm	10 cu m/hr
	744B30-749B30 – 60 gpm	14 cu m/hr
Suggested Maximum Differential Pressure:	742B30	35 psid 2.4 bar
	743B30 - 749B30	50 psid 3.4 bar

Disposal of used cartridges must comply with applicable federal, state and local laws and regulations.

Order Information

To order contact your local 3M Filtration Products distributor or call toll free 1-800-648-3550.

IMPORTANT NOTICE: The information in this literature is based on tests 3M believes are reliable. It is not and should not be relied on as a product or technical specification. 3M does not guarantee the accuracy of this information. If any 3M products described in this literature are defective in material or workmanship, 3M will replace them at no charge. THERE ARE NO OTHER WARRANTIES FOR THESE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

This warranty does not apply to damage or defects resulting from improper use, storage or maintenance of these products. User must determine whether the 3M products described in this literature are fit for a particular purpose, suitable for user's application and meet user's performance expectations. 3M IS NOT LIABLE FOR ANY LOSS OR DAMAGES, WHETHER DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL, ARISING OUT OF THE USE OF OR INABILITY TO USE ANY OF THESE PRODUCTS REGARDLESS OF LEGAL THEORY.



Filtration Products

3M Center, Building 60-1S-16
St. Paul, MN 55144-1000
800-648-3550



85% Pre-consumer waste paper
15% Post-consumer waste paper