


OSMO TITAN Series Pretreatment

Water Softeners

OSMO TITAN Series pretreatment is designed for durable operation, easy installation and straight-forward control. OSMO TITAN is ideal for your industrial filtration needs with epoxy-lined carbon steel vessels, robust materials of construction, and various configuration options to suit your specific application needs. The units are also the perfect compliment to the OSMO TITAN Series line of reverse osmosis systems. Visit www.gewater.com for more information.

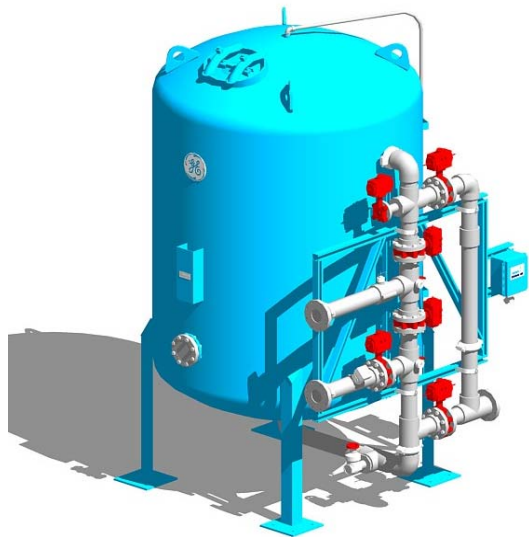

General Features

- Epoxy-lined carbon steel tanks, designed to ASME code at 100 psig (code stamp optional)
- Brine tank with cover and air check valve
- Resilient seated butterfly service valves with stainless steel disc and stem; air actuated / spring-to-close
- Stainless steel face-piping
- 4-inch media clean out port on side of tank
- Sight glass on backwash line
- NEMA 4 remote I/O enclosure for external control
- Instrumentation: Service/backwash flow transmitter, pre- / post- softener pressure gauges

Figure 1. OSMO TITAN Series Flow Range

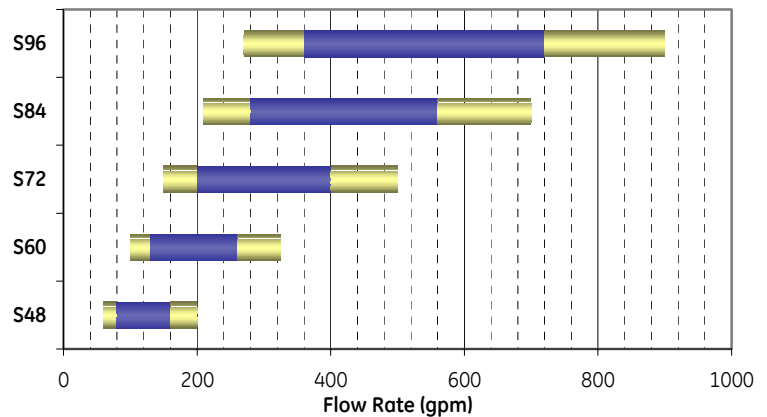


Table 1. Water Softener Specifications

Model	Part Number	Connections (inches)	Tank (inches)	Overall Height (inches)	Brine Tank		Flow (gpm)			Resin Volume (ft3)	Capacity (grains)
					Dimensions (inches)	Capacity (lbs)	Min	Max	BkWsh		
S48	3023945	3	48x72	122	52x60	2600	60	200	60	40	1200K
S60	3023946	3	60x72	125	60x60	4000	100	325	100	65	1950K
S72	3023947	4	72x72	130	82x60	7300	150	500	150	100	3000K
S84	3023948	4	84x72	134	90x60	7500	210	700	210	140	4200K
S96	3023950	6	96x72	144	96x60	7700	270	900	270	180	5400K



Find a contact near you by visiting gewater.com or e-mailing custhelp@ge.com.

Global Headquarters
Trevose, PA
+1-215-355-3300

Americas
Watertown, MA
+1-617-926-2500

Europe/Middle East/Africa
Heverlee, Belgium
+32-16-40-20-00

Asia/Pacific
Shanghai, China
+86 (0) 411-8366-6489