

ROSave.Z* Depth Cartridge Filters

For Reverse Osmosis Pretreatment Using Z.Plex* Technology

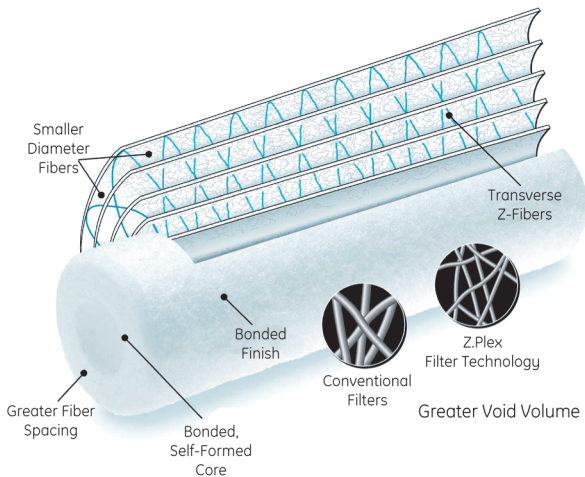


Figure 1: Z.Plex Filter Technology

Description and Use

ROSave.Z is manufactured using patent pending Z.Plex filter technology (Figure 1) and is engineered for reverse osmosis pretreatment and other pure water applications. ROSave.Zs' proprietary filter matrix provides unmatched performance in these applications.

- Up to twice the life of conventional depth filters
- Up to 50% lower pressure drop
- Up to 100% greater dirt holding capacity
- Superior SDI reduction
- Melt-bonded exterior ensures no media migration
- Provides lower total cost of filtration operations
- NSF 42, FDA approved

Typical Applications

Reverse osmosis pretreatment in industries including:

- Bottled water
- Beverage
- Electronics

General Properties


Materials of Construction

ROSave.Z filters are made of 100% polypropelene construction. Tables 1 and 2 provide information on dimensions and flow performance.

Table 1: Dimensions

Nominal Outside Diameter	2.50" (6.4 cm)
Nominal Inside Diameter	1" (2.5 mm)

Table 2: ROSave.Z 1 and 5 micron vs. Conventional 5 micron Flow Performance in Clean Water¹

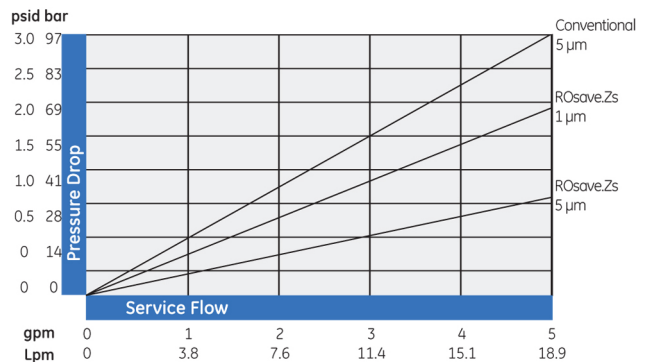

¹ Data based on 10" length filter



Find a contact near you by
visiting gewater.com or
e-mailing custhelp@ge.com.

Global Headquarters
Trevose, PA
+1-215-355-3300

Americas
Watertown, MA
+1-617-926-2500

Europe/Middle East/Africa
Heverlee, Belgium
+32-16-40-20-00

Asia/Pacific
Shanghai, China
+86 (0) 411-8366-6489

Micron Ratings, Lengths and End Adapters

- Micron ratings: 1 and 5 micron
- Standard lengths fit most housings - custom lengths are also available
- Wide range of end adapters including self-sealing spring, 222 and 226 O-rings, and extended cores.

Additional Information

ROSave.Z cartridge filters are made from thermally-bonded fibers of polypropylene. GE Water & Process Technologies certifies that it uses no resin binders, lubricants, antistatic or release agents or other additives in the manufacture of these cartridges, and that the resin used for manufacturing the filter media meets the food contact requirements of U.S. FDA 21CFR regulations. When required, specify only FDA compliant sealing materials and end-adapters.

GE filter cartridges are designed and manufactured for resistance to a wide range of chemical solutions. Conditions will vary with each application and users should carefully verify chemical compatibility. Please contact your GE representative for more information.

If you are ordering ROSave.Z filters with standard ends (with no adapter on either end), select one designation from each of the first three columns. Your Product Order Number will look like this: RO.Zs 05-40. If you are ordering ROSave.Zs with end adapters, select designations from all applicable columns. Your Product Order Number will look like this: RO.Zs 05-40 XK.

Table 4: Ordering Information

Type	Micron Rating mm	Cartridge Length Inches (cm)	End #1 Adapter	End #2 Adapter	Material
RO.Zs	01 = 1 05 = 5	9 3/4 (24.8) 9 7/8 (25.1)	L = Extended Core E = 222 O-Ring	K = Self seal spring H = Fin	O-Rings S = Silicone
I.D. = 1.0 O.D. = 2.5		10 (25.4) 19 1/2 (49.5) 20 (50.8) 29 1/4 (74.3)	F = 226 O-Ring X = Standard ROsave.Zs plain end (no gasket)	S = Solid End X = Standard ROSave.Zs (no gasket)	E = EPDM V = Viton ² B = Buna

²Viton is a registered trademark of DuPont.

